


# NEW HOLLAND

## Church Furniture

"Setting the Industry Standard"™

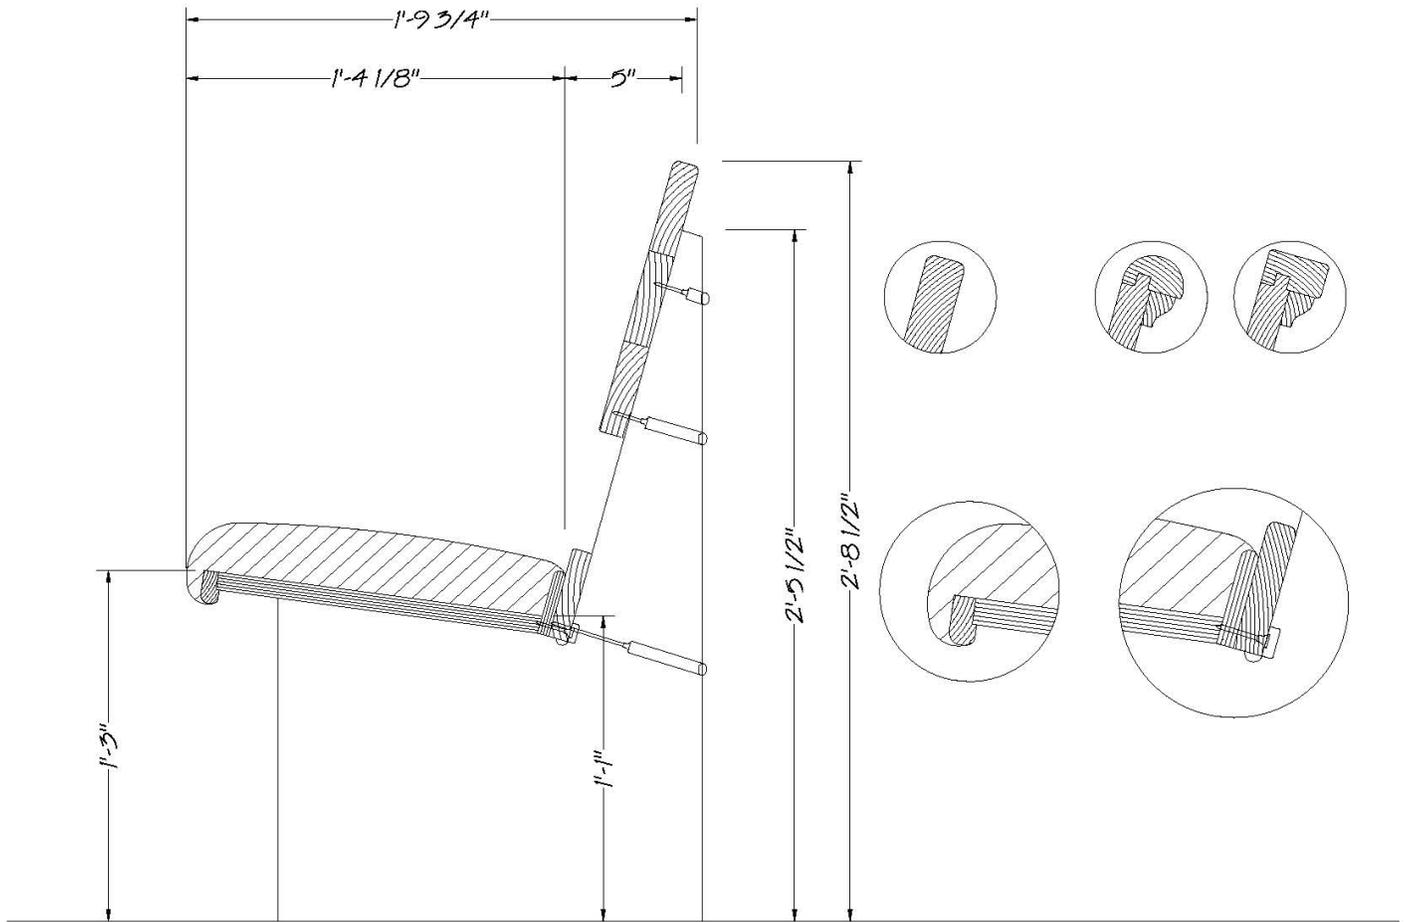

### SPECIFICATIONS FOR: 90-US3

#### SEATS:

- Upholstered foam seat.
- Construction to consist of 3/4" cabinet grade plywood seat foundation reinforced with wood members running horizontally and continuously along front and back edge of seat for maximum strength and stability.
- 3" thick, 1.85 lb. density foam glued to seat foundation.
- Upholstered with choice of fabric. Fabric is tightly stretched using even pneumatic pressure, with edges tucked, folded, and stapled to underseat.

#### BACKS:

- Solid open style back.
- Construction to consist of 5/4 solid selected specie lumber to be edge glued 12" wide with titebond wood glue.
- Caprails not included; available as an option.

\* All backs will be manufactured using first quality solid lumber of selected wood specie. Selected for color and texture, free from knots or defects which would affect the appearance or durability of the furniture. All lumber will be air-seasoned and kiln dried to a moisture content of not over 7%.

\* Also available with spring seating system (optional).