


NEW HOLLAND

Church Furniture

"Setting the Industry Standard"™

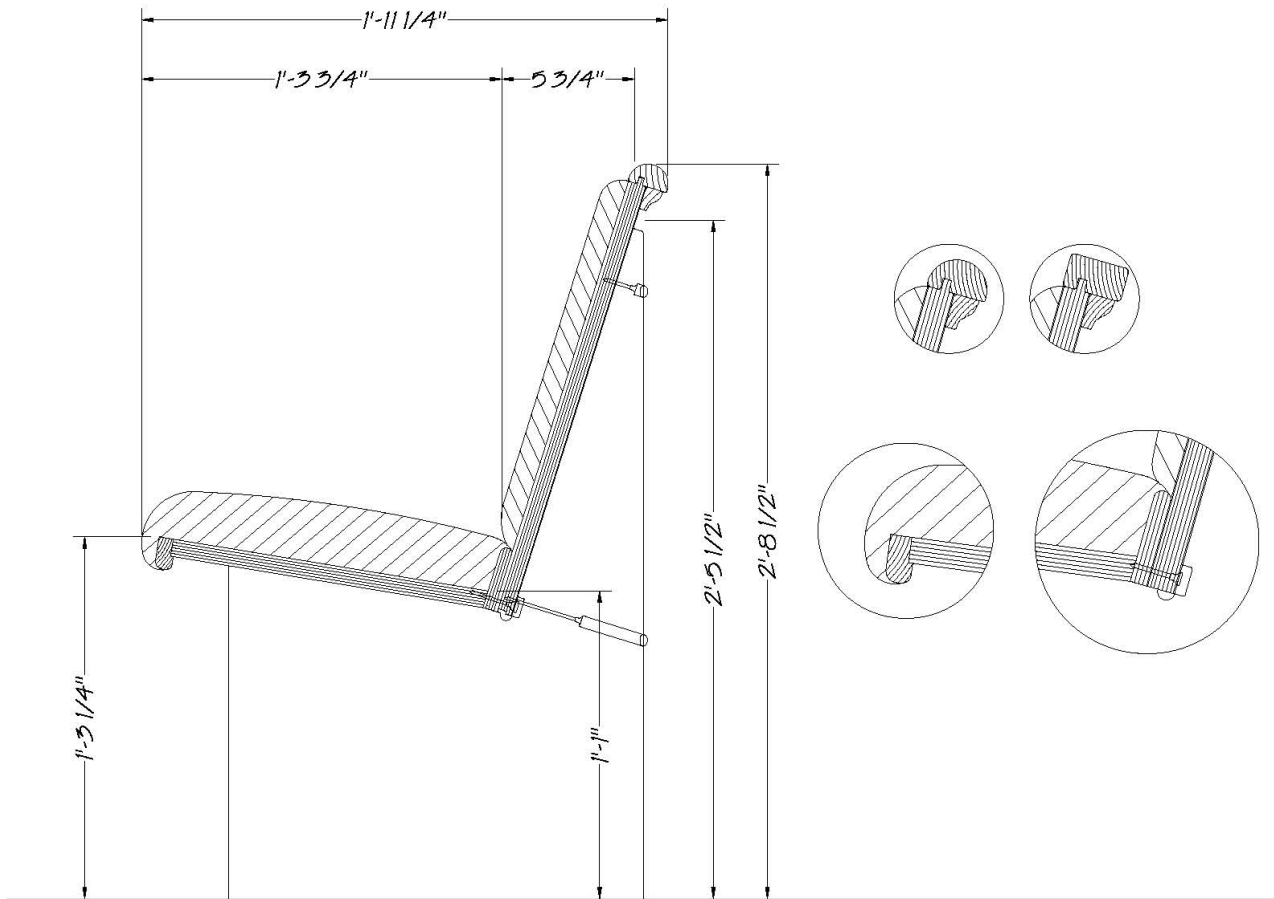

SPECIFICATIONS FOR: 80-US3

SEATS:

- Upholstered foam seat.
- Construction to consist of 3/4" cabinet grade plywood seat foundation reinforced with wood members running horizontally and continuously along front and back edge of seat for maximum strength and stability.
- 3" thick, 1.85 lb. density foam glued to seat foundation.
- Upholstered with choice of fabric. Fabric is tightly stretched using even pneumatic pressure, with edges tucked, folded, and stapled to underseat.

BACKS:

- Upholstered both sides.
- Construction to consist of 3/4" cabinet grade plywood core.
- Face side includes 1" foam thickness with 1.5 lb. density.
- Both sides are upholstered with choice of fabric. Fabric is tightly stretched using even pneumatic pressure, with edges tucked and stapled to center core.
- Finished with 5/4 solid wood cap rail with a tongue and groove joint securely fastened to back, and a solid wood undercap molding.

* Also available with spring seating system (optional).

* W Option – 2" wider back available